

CDO2-L



Industrial LoRaWAN® Operated Low Power Optical Dissolved Oxygen Sensor

- Compatible with all LoRaWAN® frequencies
- Wide range of industrial applications
- High accuracy
- Designed to meet outdoor applications
- Long-term durable performance in harsh environment
- Ultra-low power
- Pre-configured with no need of programming or hardware setting



TECHNICAL SPECIFICATION

Sensor

• Measurement principle	luminescent optical, approved by the ASTM - D888-05 without need of recalibration
• Measure ranges	0 – 20 (mg/L) 0 – 20 (ppm) 0 – 200 (%)
• Accuracy	± 0.1 (mg/L) ± 0.1 (ppm) ± 1 (%)
• Resolution	0.01
• Water Move	No necessary move
• Temperature Compensation	Via NTC
• Storage Temperature (°C)	-10 to +60

Power

• Power Supply	Built-in Replaceable Lithium Battery, External Power (option)
• Rated Voltage (V)	3.6
• Battery Lifetime	5,000+ Readings and 5,000+ Transmission (More than 5 years for most of applications)

Physical

• Materials	Sensor Head: stainless steel 316L (Titanium on request) Enclosure: POM / ASA
• Max Pressure on Sensor Head	5bar
• Weight (g)	~800 (for 3m cable)
• Protection Rate	IP68 for sensor head and IP66 or IP68 and UV Protected enclosure



www.10sorex.com



Sales@10sorex.com



+1 (424) 400-4964

CDO2-L

Communication

• LoRaWAN® Version, Class	1.0.2revB, Class A (Class C on request)
• LoRaWAN® Frequency Zone	AS923, EU868, US902-928, AU915-928 (other zones available on request)
• LoRaWAN® Activation Type	OTA (default), ABP
• Sampling Type	Periodic (default), Event triggered
• Sampling Period	Configurable via downlink (default 4 hours)
• Transmission Type	Per sample (default), Event triggered, Conditional
• Parameter Configuration	Over-the-air via LoRaWAN® downlinks Locally via wireless connectivity
• Firmware Update	Locally via Wireless Connectivity, Over The Air

NETWORK CONNECTION AND VISUALIZATION

Network Integration

- Integratable to all main networks (Actility, Alibaba, Cisco, Digita, Everynet, Helium, Kerlink, kpn, Lorient, machine-Q, Objenious, Orange, Orbiwise, Proximus, Senet, Sens, Swisscom, TATA, The Things Network (TTN), TTI and any other network)

Visualization And Data Management

- 10Sorex white label microservice platform, and Integratable to all main IIoT platforms directly or through the api (AWS, Azure, PTC ThingWorx, Bosch IoT, Cisco Jasper & Kinetic, Sierra Numerex, MathWorks, ThingSpeak, GE Digital Predix, LandisGyr, Siemens MindSphere, Cumulocity, myDevices, Ubidots, TagoIO, ALSO AllThingsTalk, HPE IoT and any other major IoT platform).

10Sorex Platform Main Features

- Encrypted ultra-low power communication protocol
- Advanced device inventory
- Integration APIs for enterprise systems
- Multi-tenant role-based access control
- Data export and import
- White-label platform for enterprise runs on private account
- Variable alarm setting for high and low thresholds and multi-channel alerting
- Sampling and transmission interval configuration
- Transmission condition configuration
- Other configurations and customization available on request



Encrypted & ultra-low power



Integratable



Dynamic alerting



Multi-tenant



Scalable


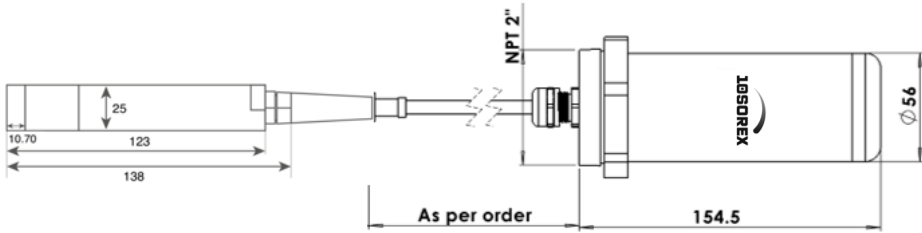

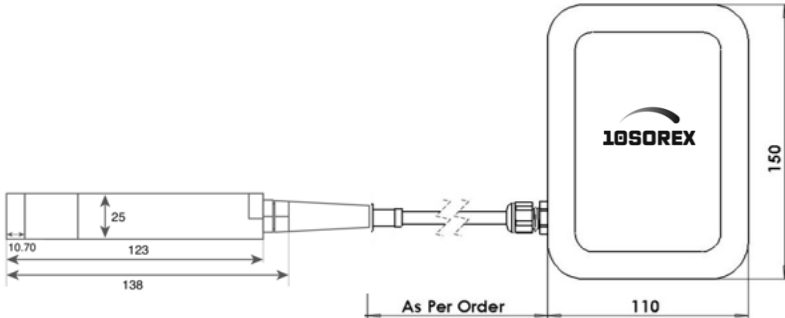


Composable & API first



CDO2-L

MODEL GUIDE

Model	Option / Schematic
C Model 	 <p>IP68 sensor head, connected to POM enclosure IP68 enclosure: with cable gland, without on/off switch, and with internal antenna IP65 enclosure: with sensor connector, on/off switch, and external antenna</p>
E Model 	 <p>IP68 sensor head, connected to IP65 ASA enclosure with on/off switch</p>

INDUSTRIES



Water &
Wastewater



Agriculture &
Farming



Oil & Gas



Marine &
Oceanography



Mining &
Construction



Environmental Monitoring

APPLICATIONS

- Bore Hole Mineral Level
- Water Resources
- Surface Water, Rivers and Catchments
- Sea Water

- Wastewater Tank
- Industrial Wastewater
- Regulatory Automated Reporting
- Drinking Water



CDO2-L

ORDERING CODE

CDO2-L									
LoRaWAN Frequency Zone									
AS (AS923)			AUx (AU915-928) (Sub Band x)			EU (EU868)		USx (US902-928) (Sub Band x)	
LoRaWAN Activation									
A (Over The Air Activation - OTAA)					P (Activation By Personalization - ABP)				
Measurement Range									
S: 0 to 20 mg/L, 0 to 20 ppm, 0-200%									
Enclosure									
C5: Cylindrical					E5: Rectangular				
Cable Length									
S: 3m				Other options available on request					
Device Activation									
S: With On/Off Switch							X: No Switch (Always On)		
Antenna Option									
E: External					I: Internal				
Options									
(On request) ¹									
CDO2-L	AS	A	S	C5	S	S	E		

Sample Product Code:

- CDO2-L-AS-A-S-C5-S-S-E**

Dissolved oxygen sensor operated on LoRaWAN®, frequency of AS923, Over The Air Activated, measurement range of 0-200%, In cylindrical enclosure, standard cable length, with on/off switch and external antenna.

¹⁾ Product Options:

- EP**: sensor with external power supply connector for 12V supply (only for E type enclosure, adaptor is not included)
- EPB**: connector for 12V supply with internal battery backup (only for E type enclosure)
- HG**: high-gain external antenna
- WF**: Active WiFi module on device for communication/ firmware update through Mobile phone NFC module (only for E type enclosure)
- HCB**: high-capacity battery (only for E type enclosure)



www.10sorex.com



Sales@10sorex.com



+1 (424) 400-4964