

A photograph showing three large, black, ribbed cylindrical wastewater storage tanks installed in a trench. The tanks have green circular access covers on top. An orange pipe runs along the ground next to the tanks.

Remote Wastewater Tank Level Monitoring

Effectively monitoring wastewater tank levels in remote areas is critical to maintaining efficient operations, reducing costs, and minimizing environmental impact.

CHALLENGE

In remote locations or areas with limited accessibility, traditional wastewater tank level monitoring systems can be challenging to implement and maintain. The lack of continuous data collection and manual inspections can result in inefficient operations, increased costs, and potential environmental hazards.

SOLUTION

10Sorex's battery-operated Submersible Level Sensor with corrosion resistance, leveraging NB-IoT technology, provides an ideal solution for remote wastewater tank level monitoring. The specific IoT sensor used in this case is 10Sorex's Submersible Level Sensor, which is ruggedized and IP65 rated, making it perfect for harsh industrial applications.


Benefits of using this approach:

- Near real-time monitoring: With data transmitted every few hours, operators can make informed decisions and respond quickly to changing conditions.
- Corrosion resistance: 10Sorex sensors are built with corrosion-resistant materials to withstand harsh wastewater environments.
- Battery-operated: No external power source is required, making the sensor suitable for remote locations.
- Ruggedized and IP65 rated: Designed for harsh industrial applications, ensuring reliable performance in challenging environments.

Remote Wastewater Tank Level Monitoring

- Low maintenance: The NB-IoT technology allows for seamless communication, reducing the need for manual inspections and maintenance.
- Cost reduction: The automated monitoring system reduces labor costs associated with manual inspections and potential damage due to inefficient monitoring.
- Environmental protection: Timely detection of wastewater overflow or leakage prevents environmental contamination and complies with regulations.

This solution helps address the challenge of remote wastewater tank level monitoring by providing near real-time data, reducing maintenance requirements, and ensuring efficient operations that minimize environmental impact.



Battery Operated



Ruggedized Design



Easy Install



Pre-Configured




Secure



Quick ROI

TECHNOLOGY

10Sorex employs cutting-edge communication technology by utilizing the LTE Cat M1 protocol, which operates on 4G and 5G cellular networks, making it suitable for mobile and stationary monitoring applications. However, its remarkably low power consumption and superior penetration rate, specifically designed for industrial solutions, sets it apart. Narrowband Internet of Things (NB-IoT) and LTE Cat M1 are advanced communication technologies that offer significant advantages for monitoring applications. These technologies provide efficient and reliable connectivity for IoT devices, allowing for seamless communication between our sensor and remote monitoring systems. NB-IoT and LTE Cat M1 are known for their low power consumption, enabling prolonged battery life for the devices, which is crucial for remote or hard-to-reach areas. Moreover, these technologies offer excellent penetration capabilities, allowing for reliable communication even in challenging environments, such as underground or remote locations where devices are often deployed. NB-IoT and LTE Cat M1 also provide secure and scalable connectivity, enabling robust and cost-effective solutions for monitoring applications in various industrial sectors, including agriculture, utilities, logistics, and more.

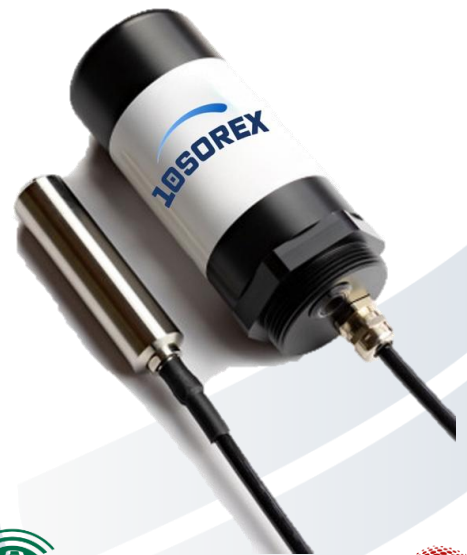

Remote Wastewater Tank Level Monitoring

SENSOR TECHNICAL SPECIFICATIONS

• Range (m)	3m (or other ranges)
• Accuracy (combined linearity, hysteresis, repeatability) (%Span)	±0.25 (typ.)
• Resolution (%Span)	±0.01
• Temperature Coefficient of Zero (%FS/°C)	≤±0.03
• Temperature Coefficient of Span (%FS/°C)	≤±0.03
• Long Term Stability (1 year) (%Span)	≤ 0.2
• Overload Protection (%FS)	150
• Load Cycles (Zero to Full Scale) (Million)	10+
• Storage / Operation Temperature (°C)	-20 ~ +85
• Compensated Temperature (°C)	0 ~ +60
• Power Supply	Built-in Replaceable Lithium Battery
• Rated Voltage (V)	3.6
• Battery Lifetime	10,000+ transmissions
• Materials	Body: Hastelloy or PVDF, Diaphragm: Hastelloy or Ceramic (Al2O3), Enclosure: POM, O-ring: FKM/ FFKM
• Weight (g)	~1200 (for 5m range)
• Protection Rate	IP66, UV Protected enclosure and IP68 sensor head
• SIM Card Type	4FF Nano-SIM, from any Network Provider
• Firmware Update	Over The Air, Locally via Wireless Connectivity
• Sampling Period	Configurable via downlink (default 4 hours)
• Communication Bands	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28 and B39
• Antenna	Internal (Default)/ External (customised options available)

Remote Wastewater Tank Level Monitoring

PLATFORM FEATURES

10Sorex's software platform is a comprehensive and user-friendly solution specifically designed for diesel delivery management. The platform offers a wide range of features tailored for diesel delivery operations, including real-time data visualization, customizable alerts and notifications, historical data analysis, and predictive analytics. It provides users with a holistic view of their diesel delivery assets, allowing them to make data-driven decisions for optimal fuel management. The platform is accessible via web browsers and mobile devices, providing convenient remote access to critical information anytime, anywhere. 10Sorex's software platform is designed with a user-centric approach, offering intuitive navigation and a user-friendly interface for easy setup and configuration. With its advanced features and ease of use, 10Sorex's software platform empowers users to effectively monitor and manage their diesel delivery operations in remote areas, ensuring efficient and sustainable fuel resource management.

- Encrypted ultra-low power communication protocol
- Advanced device inventory
- Integration APIs for enterprise systems
- Multi-tenant role-based access control
- Data export and import
- White-label platform for enterprise runs on private account
- Variable alarm setting for high and low thresholds and multi-channel alerting
- Sampling and transmission interval configuration
- Transmission condition configuration
- Other configurations and customization available on request



Encrypted &
ultra-low power



Integratable



Dynamic alerting



Multi-tenant



Scalable



Composable &
API first



Low cost



Action management




Resource monitoring

LM-TA-WW-N

Remote Wastewater Tank Level Monitoring

NAME	LAST DATA	BATTERY	SIGNAL QUALITY	NOTE
NB-107 Water Level Sensor #70B3D5CD01009A9	847 53 minutes ago	3.58 V	high	Measuring Water and Range On to Sea
CS02-N #70B3D5CD01009D4	91.35 9 minutes ago		high	NB-107 - Cal-MI Conductivity and Salinity Sensor
TTS2-N #70B3D5CD01009AB	13.7 °C 36 seconds ago	3.53 V	high	Temperature sensor with Sea wire
PTS2-N #70B3D5CD01009BF	20.47 °C 36 seconds ago	3.49 V	high	NB-107 Pressure & Temperature Sensor
NB-107 Temperature Sensor #70B3D5CD01009F2	2.78 °C 1 hour ago	3.45 V	high	Measuring Temperature

Single-screen visualization of device data

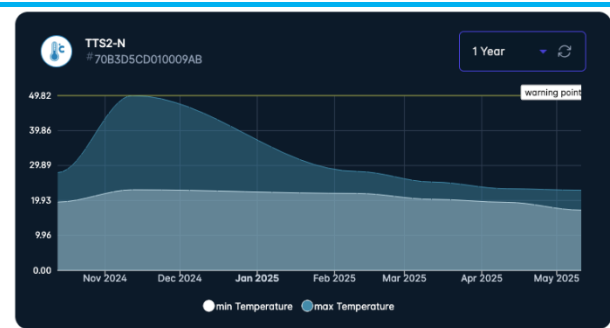


Easy analytic insight into long-term data

VERSIONS	Webhook-API
Webhook-API	GET /new/webhooks Get Webhooks
USB & SUBSCRIPTION MANAGEMENT	POST /new/webhooks Create Webhook
DATA STORE	GET /new/webhooks/{id} Get Webhook Data
DATA PROCESSING	POST /new/webhooks/{id} Update Webhook
DATA NOTIFICATIONS	DELETE /new/webhooks/{id} Delete Webhook
ALERT RULES	GET /new/trigger Get Trigger
DEVICE INVENTORY	GET /new/trigger/{trigger_id} Get Trigger Data
SCHEMAS	

Integration-ready Webhook & APIs



Global visualization of device locations with address-level zoom

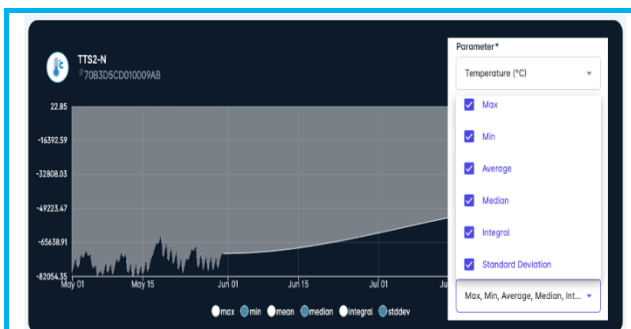

Customizable aggregations & stats

Create Alert

PTS2-N
#70B3D5CD01009D4

Conditions

Parameter*
Level (%)

Operation*
Less than

Threshold*
20

Only alert when the threshold has been breached for: 10 minutes

Details

Message*
Level Less than 20

Alert Level*
Warning

Send notification every
Interval*
2 Minutes

☒ Also send a notification when alert is cleared

Method*
SMS
Email

Clear Save

Multi-channel, rule-based alert management

LM-TA-WW-N

Remote Wastewater Tank Level Monitoring

INDUSTRIES SERVED



Water &
Wastewater



Mining &
Construction



Oil & Gas



City & Councils

INTEGRATION OPTIONS

10Sorex's solution sets itself apart with its pre-configured and plug-and-play design, eliminating the complexities of configuration, programming, and connection to the platform. This unique approach ensures that users can start monitoring their diesel tanks quickly and easily without any technical hassles. Additionally, 10Sorex offers seamless integratability at both the network and platform levels, allowing for easy integration with any network or visualization/analysis platform. This competitive advantage makes 10Sorex's solution highly adaptable and compatible with existing systems, providing users with flexibility and convenience in managing their diesel resources effectively.

LM-TA-WW-N



Remote Wastewater Tank Level Monitoring

ORDERING PROCESS

10Sorex offers simple and easy way to order the solution from any location on earth with narrow band cellular coverage. Please visit our sales portal (www.10sorex.com) or contact us to discuss your application. This is the first step to experience a reliable IoT solution at scale.



Purchase the solution online



Learn more about our Software Platform



View the Included Sensor Datasheet



Browse our other solutions

All details are subject to change without prior notice

© All Rights Reserved for 10Sorex

Rev2025_00



Integrated IoT Solutions

Email: sales@10sorex.com

Web: www.10sorex.com

