

PLV3-L



LoRaWAN® Operated IP68 Low Power Floating Level Transmitter for Water Resource Management

- Compatible with all LoRaWAN® frequencies
- Wide range of industrial applications
- High accuracy and Ultra-low power
- Designed to meet outdoor applications
- Long-term durable performance in harsh environment
- Designed for Water Resource Level and Volume Measurement



TECHNICAL SPECIFICATION

Sensor

• Range (m H2O)	1, 2, 3, 5, 10 (or other ranges up to 200)
• Accuracy (combined linearity, hysteresis, repeatability) (%Span)	±0.25 (typ.)
• Resolution (%Span)	±0.01
• Pressure Reference	Sealed Gauge (with Built-in Atmospheric Pressure Sensor and floating housing)
• Temperature Coefficient of Zero (%FS/°C)	≤±0.03
• Temperature Coefficient of Span (%FS/°C)	≤±0.03
• Long Term Stability (1 year) (%Span)	≤ 0.2
• Overload Protection (%FS)	150
• Load Cycles (Zero to Full Scale) (Million)	10+
• Storage / Operation Temperature (°C)	-20 ~ +85
• Compensated Temperature (°C)	0 ~ +60

Power

• Power Supply	Built-in Replaceable Lithium Battery, External Power (option)
• Rated Voltage (V)	3.6
• Battery Lifetime	100,000+ readings and 20,000+ transmission (More than 10 years for most applications)

Physical

• Materials	O-rings: Viton, Sensor Head: SS304, Diaphragm: SS316, Oil: Silicon, Enclosure: POM and Compressed Plastic
• Process Connection	No Process Connection (or on request)
• Weight (g)	~1800 (for 10m range)
• Protection Rate	IP68 and UV Protected enclosure



www.10sorex.com



Sales@10sorex.com



+1 (424) 400-4964

PLV3-L

Communication

• LoRaWAN® Version, Class	1.0.2revB, Class A (Class C on request)
• LoRaWAN® Frequency Zone	AS923, EU868, US902-928, AU915-928 (other zones available on request)
• LoRaWAN® Activation Type	OTA (default), ABP
• Sampling Type	Periodic (default), Event triggered
• Sampling Period	Configurable via downlink (default 4 hours)
• Transmission Type	Per sample (default), Event triggered, Conditional
• Parameter Configuration	Over-the-air via LoRaWAN® downlinks Locally via wireless connectivity
• Firmware Update	Locally via Wireless Connectivity, Over The Air

NETWORK CONNECTION AND VISUALIZATION

Network Integration

- Integratable to all main networks (Activity, Alibaba, Cisco, Digita, Everynet, Helium, Kerlink, kpn, Lorient, machine-Q, Objenious, Orange, Orbiwise, Proximus, Senet, Sens, Swisscom, TATA, The Things Network (TTN), TTI and any other network)

Visualization And Data Management

- 10Sorex white label microservice platform, and Integratable to all main IIoT platforms directly or through the api (AWS, Azure, PTC ThingWorx, Bosch IoT, Cisco Jasper & Kinetic, Sierra Numerex, MathWorks, ThingSpeak, GE Digital Predix, LandisGyr, Siemens MindSphere, Cumulocity, myDevices, Ubidots, TagoIO, ALSO AllThingsTalk, HPE IoT and any other major IoT platform).

10Sorex Platform Main Features

- Encrypted ultra-low power communication protocol
- Advanced device inventory
- Integration APIs for enterprise systems
- Multi-tenant role-based access control
- Data export and import
- White-label platform for enterprise runs on private account
- Variable alarm setting for high and low thresholds and multi-channel alerting
- Sampling and transmission interval configuration
- Transmission condition configuration
- Other configurations and customization available on request



Encrypted &
ultra-low power



Integratable



Dynamic alerting



Multi-tenant



Scalable


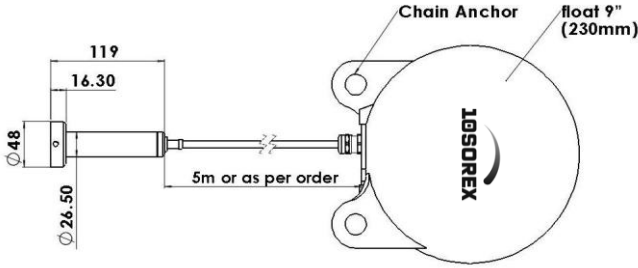


Composable &
API first



PLV3-L

MODEL GUIDE

Model	Option / Schematic
Standard Model 	 <p>PLV3 Dimensions</p>

INDUSTRIES



Water &
Wastewater



Agriculture &
Farming



Environmental
Monitoring



Marine &
Oceanography



Mining &
Construction



Water Delivery

APPLICATIONS

- Water Resources Level
- Dam Level
- Water Supply

- Lake Level
- Hydrology Research
- Bush Fire Management



PLV3-L

ORDERING CODE

PLV3-L										
LoRaWAN Frequency Zone										
AS (AS923)			AUx (AU915-928) (Sub Band x)			EU (EU868)		USx (US902-928) (Sub Band x)		
LoRaWAN Activation										
A (Over The Air Activation - OTAA)					P (Activation By Personalization - ABP)					
Measurement Range										
1, 2, 3, 5, 10, 20, 50, 100, 200m H2O (or any other non-standard range)										
Sensor Head Material										
S: SS304 or SS316L					H: Hastelloy					
Cable Material										
U: Polyurethane					Other options available on request					
Cable Length										
S: Same as measurement length					Other options available on request					
Enclosure										
S: Standard										
Device Activation										
X: No Switch (always on)										
Antenna Option										
E: External					I: Internal					
Options (On request) ¹										
PLV3-L	AS	A	3m	S	U	S	S	X	E	

Sample Product Code:

- PLV3-L-AS-A-3m-S-U-S-S-X-E

LoRaWAN® operated IP68 rated level sensor with floating housing, frequency of AS923, over the air activated, measurement range of 3m H2O, with stainless steel sensor head and Polyurethane cable, standard cable length activated in the factory and equipped with external antenna.

