

pH Monitoring in Remote Industrial Water Treatment Units

Effective pH monitoring in remote water treatment facilities is a critical component of ensuring water quality and safety, ultimately contributing to the global aim of sustainable water management.

CHALLENGE

Remote industrial water treatment units often face challenges in continuous pH monitoring due to their inaccessible locations, harsh environmental conditions, and power constraints. This lack of consistent monitoring leads to ineffective water treatment, posing risks to both human health and environmental safety.

SOLUTION


Using the battery-operated pH sensor manufactured by 10Sorex, this challenge can be significantly mitigated. These sensors leverage Narrowband IoT (NB-IoT) technology to transmit data, providing near real-time updates on the pH levels of the water.

- **Sensors Used:** The 10Sorex pH sensor is the key device used in this solution. With its IP65 rating, it is ruggedized and designed to withstand the harsh conditions of remote industrial sites.
- **Ease of Installation:** Due to their battery-operated nature, these sensors can be installed with minimal hassle and do not require a constant power supply.
- **Near Real-Time Monitoring:** With data transmission every few hours, it allows for near real-time monitoring of pH levels in the water. This improves the response time to any anomalies and enhances the overall water treatment process.

pH Monitoring in Remote Industrial Water Treatment Units

- **Durability:** The ruggedized design of 10Sorex sensors ensures their longevity, reducing maintenance and replacement costs.
- **Enhanced Connectivity:** The use of NB-IoT technology allows for reliable and enhanced connectivity even in remote locations, ensuring that pH data is consistently reported.

Addressing this challenge using the 10Sorex pH sensor will drastically improve the monitoring process in remote water treatment units, resulting in enhanced water quality and resource management.



Battery Operated



Ruggedized Design



Easy Install



Pre-Configured



Secure



Quick ROI

TECHNOLOGY

10Sorex employs cutting-edge communication technology by utilizing the LTE Cat M1 protocol, which operates on 4G and 5G cellular networks, making it suitable for mobile and stationary monitoring applications. However, its remarkably low power consumption and superior penetration rate, specifically designed for industrial solutions, sets it apart. Narrowband Internet of Things (NB-IoT) and LTE Cat M1 are advanced communication technologies that offer significant advantages for monitoring applications. These technologies provide efficient and reliable connectivity for IoT devices, allowing for seamless communication between our sensor and remote monitoring systems. NB-IoT and LTE Cat M1 are known for their low power consumption, enabling prolonged battery life for the devices, which is crucial for remote or hard-to-reach areas. Moreover, these technologies offer excellent penetration capabilities, allowing for reliable communication even in challenging environments, such as underground or remote locations where devices are often deployed. NB-IoT and LTE Cat M1 also provide secure and scalable connectivity, enabling robust and cost-effective solutions for monitoring applications in various industrial sectors, including agriculture, utilities, logistics, and more.



NB-IoT™

LTE-



pH Monitoring in Remote Industrial Water Treatment Units

SENSOR TECHNICAL SPECIFICATIONS

• pH Measurement Range (pH)	0-14
• pH Accuracy (pH)	± 0.1
• pH Resolution (pH)	0.01
• ORP Measurement Principle	Combined electrode (ORP/reference) Platinum tip, Ag/AgCl AgAgCl. Gelled reference (KCl)
• ORP Measurement Range (mV)	-1000 to +1000
• ORP Resolution (mV)	0.1
• ORP Accuracy (mV)	± 2
• Temperature Measurement Range (°C)	0 to +50
• Temperature Resolution (°C)	0.01
• Temperature Accuracy (°C)	± 0.5
• Storage Temperature (°C)	0 to +50
• Power Supply	Built-in Replaceable Lithium Battery
• Rated Voltage (V)	3.6
• Battery Lifetime	10,000+ transmissions
• Materials	Sensor Head: PVC, DELRIN, special pH glass, platinum, Polyamide, cable: Coaxial armoured polyurethane, Enclosure: POM
• Max Pressure on Sensor Head	5bar
• Weight (g)	~900 (for 3m cable)
• Protection Rate	IP68, sensor head and IP66, UV Protected enclosure
• SIM Card Type	4FF Nano-SIM, from any Network Provider
• Firmware Update	Over The Air, Locally via Wireless Connectivity
• Sampling Period	Configurable via downlink (default 4 hours)
• Communication Bands	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28 and B39
• Antenna	Internal (Default)/ External (customised options available)

pH Monitoring in Remote Industrial Water Treatment Units

PLATFORM FEATURES

10Sorex's software platform is a comprehensive and user-friendly solution specifically designed for diesel delivery management. The platform offers a wide range of features tailored for diesel delivery operations, including real-time data visualization, customizable alerts and notifications, historical data analysis, and predictive analytics. It provides users with a holistic view of their diesel delivery assets, allowing them to make data-driven decisions for optimal fuel management. The platform is accessible via web browsers and mobile devices, providing convenient remote access to critical information anytime, anywhere. 10Sorex's software platform is designed with a user-centric approach, offering intuitive navigation and a user-friendly interface for easy setup and configuration. With its advanced features and ease of use, 10Sorex's software platform empowers users to effectively monitor and manage their diesel delivery operations in remote areas, ensuring efficient and sustainable fuel resource management.

- Encrypted ultra-low power communication protocol
- Advanced device inventory
- Integration APIs for enterprise systems
- Multi-tenant role-based access control
- Data export and import
- White-label platform for enterprise runs on private account
- Variable alarm setting for high and low thresholds and multi-channel alerting
- Sampling and transmission interval configuration
- Transmission condition configuration
- Other configurations and customization available on request



Encrypted &
ultra-low power



Integratable



Dynamic alerting



Multi-tenant



Scalable



Composable &
API first



Low cost



Action management




Resource monitoring

WQ-TU-PH-N

pH Monitoring in Remote Industrial Water Treatment Units

NAME	LAST DATA	BATTERY	SIGNAL QUALITY	NOTE
NB-107 Water Level Sensor #70B3D5CD01009A76	847 53 minutes ago	3.58 V	high	Measuring Water level (Range On to Set)
CS02-N #70B3D5CD01009D04	96.35 9 minutes ago		high	NB-107 - Cal-Mil Conductivity and Salinity Sensor
TTS2-N #70B3D5CD01009A08	13.7 °C 10 seconds ago	3.53 V	high	Temperature sensor with DS18B20
PTS2-N #70B3D5CD01009A0F	20.47 °C 36 minutes ago	3.49 V	high	NB-107 Pressure & Temperature Sensor
NB-107 Temperature Sensor #70B3D5CD01009A02	2.95 °C 1 hour ago	3.45 V	high	Measuring Temperature

Single-screen visualization of device data

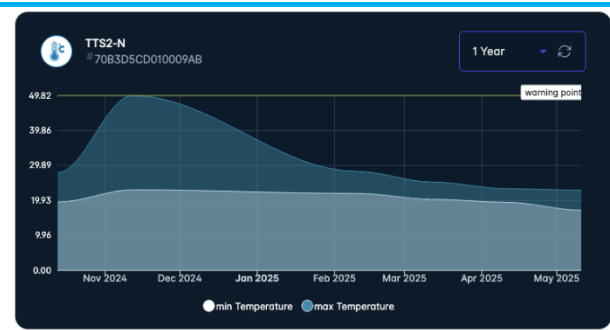


Easy analytic insight into long-term data

VERSIONS	Webhook-API
Webhook-API	GET /new/webhooks Get Webhook
USB & SUBSCRIPTION MANAGEMENT	POST /new/webhooks Create Webhook
DATA STORE	GET /new/webhooks/:id Get Webhook Data
DATA PROCESSING	POST /new/webhooks/:id Update Webhook
DATA NOTIFICATIONS	DELETE /new/webhooks/:id Delete Webhook
ALERT RULES	GET /new/trigger Get Trigger
DEVICE INVENTORY	GET /new/trigger/:trigger_id Get Trigger Data
SCHEMAS	

Integration-ready Webhook & APIs



Global visualization of device locations with address-level zoom

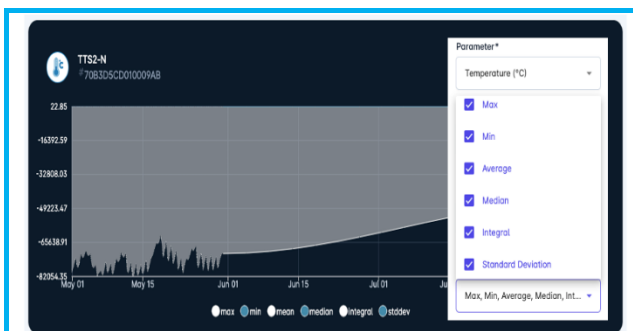

Customizable aggregations & stats

Create Alert

PTS2-N #70B3D5CD01009A08

Conditions

Parameter*
Level (°C)
Operation*
Less than
Threshold*
20
Only alert when the threshold has been breached for
minimum seconds
times

Details

Message*
Level Less than 20
Alert Level*
Warning
Send notification every
interval*
2
minutes
Also send a notification when alert is cleared
Method*
SMS
Email

Clear Save

Multi-channel, rule-based alert management

WQ-TU-PH-N

pH Monitoring in Remote Industrial Water Treatment Units

INTEGRATION OPTIONS

10Sorex's solution sets itself apart with its pre-configured and plug-and-play design, eliminating the complexities of configuration, programming, and connection to the platform. This unique approach ensures that users can start monitoring their diesel tanks quickly and easily without any technical hassles. Additionally, 10Sorex offers seamless integratability at both the network and platform levels, allowing for easy integration with any network or visualization/analysis platform. This competitive advantage makes 10Sorex's solution highly adaptable and compatible with existing systems, providing users with flexibility and convenience in managing their diesel resources effectively.

WQ-TU-PH-N



pH Monitoring in Remote Industrial Water Treatment Units

ORDERING PROCESS

10Sorex offers simple and easy way to order the solution from any location on earth with narrow band cellular coverage. Please visit our sales portal (www.10sorex.com) or contact us to discuss your application. This is the first step to experience a reliable IoT solution at scale.



Purchase the solution online



Learn more about our Software Platform



View the Included Sensor Datasheet



Browse our other solutions

All details are subject to change without prior notice

© All Rights Reserved for 10Sorex

Rev2025_00



Integrated IoT Solutions

Email: sales@10sorex.com

Web: www.10sorex.com